


# DOWNLIGHT AKANE 13W IP44 UGR<19 SWITCH 3CCT BL 1-10V

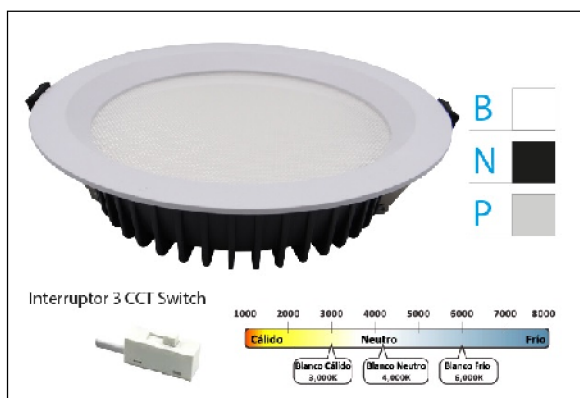

*Lighting with you*

|                            |               |
|----------------------------|---------------|
| <b>REFERENCIA</b>          | 60244BB       |
| <b>EAN-13</b>              | 8433973502547 |
| <b>CONSUMO</b>             | 13W           |
| <b>°K</b>                  | CCT           |
| <b>COLOR ITEM</b>          | Blanco        |
| <b>MATERIAL PRODUCTO</b>   | Aluminio+PC   |
| <b>LUMENS/WATT</b>         | 110Lm/W       |
| <b>LUMENS</b>              | 1430LM        |
| <b>CHIP</b>                | EPISTAR       |
| <b>NUMERO CHIPS</b>        | 104pcs        |
| <b>DRIVER</b>              | Lifud         |
| <b>VIDA UTIL</b>           | 30000H        |
| <b>FLICKER</b>             | No Flicker    |
| <b>%THD</b>                | 0,2           |
| <b>FACTOR DE POTENCIA</b>  | >0.9          |
| <b>SDCM</b>                | 2,5           |
| <b>REGULACION</b>          | 1-10V         |
| <b>IP</b>                  | IP44          |
| <b>IK</b>                  | IK02          |
| <b>PROT.SOBRETENSIONES</b> | 3KV           |
| <b>ORIENTABLE</b>          | No            |
| <b>ANGULO APERTURA</b>     | 110°          |
| <b>TEMP. TRABAJO</b>       | -20°+50°      |
| <b>VOLTAJE ENTRADA</b>     | AC 220-245V   |
| <b>CLASE</b>               | CLASE II      |
| <b>VOLTAJE SALIDA</b>      | 36V           |
| <b>FRECUENCIA</b>          | 50-60Hz       |
| <b>mA</b>                  | 180mA         |
| <b>CRI</b>                 | 80            |
| <b>UGR</b>                 | <19           |
| <b>DIAMETRO</b>            | 135mm         |
| <b>ALTURA</b>              | 50mm          |
| <b>CORTE</b>               | 115mm         |
| <b>PESO</b>                | 0,261Kg       |
| <b>GARANTIA</b>            | 5 Años        |
| <b>CERTIFICADO</b>         | CE&RoHS       |